











1500BSF

Product no.: 1500BSF

Pneumatic side cutter and tip cutter. Requires 4 - 6 bar oil-free clean compressed air



Pneumatic cutter



Handy, light and precise



Extremely versatile thanks to a selection of different cutting heads


source images

The Perfect Cut - Strong, sharp and precise, every time

Weller Erem pneumatic side cutters are light and precise. Thanks to a selection of different cutting heads they can operate extremely versatile. The cutters are suitable for cutting conventional components, soft metals or small plastic parts. The cutting heads can be interchanged easily.

THE PERFECT CUT

Strong, sharp and precise - every time

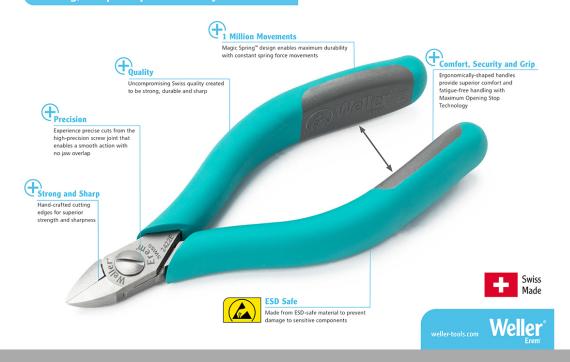













| Length of cutting edges mm Head width mm Head thickness mm Head length mm Max. cutting capability – hard wire mm Weight in oz 5.644 Length of cutting edges Inches Head width Inches Head thickness Inches Head length Inches ESD-safe on Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g 160 Erem applications Microelectronic | | |
|--|--|-----------------|
| Head width mm Head thickness mm Head length mm Max. cutting capability – hard wire mm Weight in oz Length of cutting edges Inches Head width Inches Head thickness Inches Head length Inches ESD-safe Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g Max. Weight in g Max. Cutting capability – copper wire mm Length inches 5.118 | Length mm | 130 |
| Head thickness mm Head length mm Max. cutting capability – hard wire mm Weight in oz Length of cutting edges Inches Head width Inches Head thickness Inches Head length Inches ESD-safe on Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g Head length mm Weight in g | Length of cutting edges mm | |
| Head length mm Max. cutting capability – hard wire mm Weight in oz Length of cutting edges Inches Head width Inches Head thickness Inches Head length Inches ESD-safe On Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g Max. Description of the company of the compan | Head width mm | |
| Max. cutting capability – hard wire mm Weight in oz 5.644 Length of cutting edges Inches Head width Inches Head thickness Inches Head length Inches ESD-safe on Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g | Head thickness mm | |
| Weight in oz 5.644 Length of cutting edges Inches Head width Inches Head thickness Inches Head length Inches ESD-safe On Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.644 5.644 Head width Inches Head thickness Inches ESD-safe On Cut State of the problem of the pr | Head length mm | |
| Length of cutting edges Inches Head width Inches Head thickness Inches Head length Inches ESD-safe on Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g | Max. cutting capability – hard wire mm | |
| Head width Inches Head thickness Inches Head length Inches ESD-safe On Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g | Weight in oz | 5.644 |
| Head thickness Inches Head length Inches ESD-safe On Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g | Length of cutting edges Inches | |
| Head length Inches ESD-safe on Cut Max. cutting capability – medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g | Head width Inches | |
| ESD-safe on Cut Max. cutting capability - medium hardness mm Max. cutting capability - copper wire mm Length inches 5.118 Weight in g 160 | Head thickness Inches | |
| Cut Max. cutting capability - medium hardness mm Max. cutting capability - copper wire mm Length inches 5.118 Weight in g 160 | Head length Inches | |
| Max. cutting capability – | ESD-safe | on |
| medium hardness mm Max. cutting capability – copper wire mm Length inches 5.118 Weight in g 160 | Cut | |
| copper wire mm Length inches 5.118 Weight in g 160 | Max. cutting capability – medium hardness mm | |
| Weight in g 160 | Max. cutting capability – copper wire mm | |
| | Length inches | 5.118 |
| Erem applications Microelectronic | Weight in g | 160 |
| | Erem applications | Microelectronic |