


# WQB4000SOPS

Product no.: WQB4000SOPS

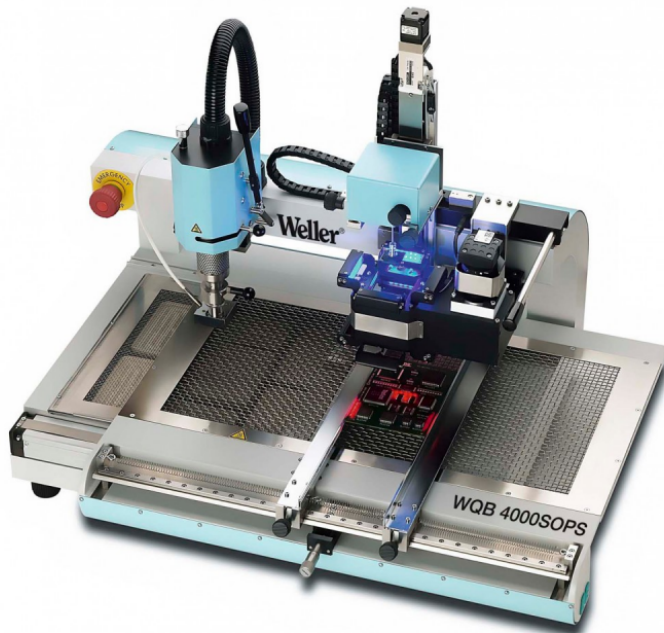

## Benefits

- > 2300 W / 120 V
- > BGA / SMT Rework system



### Technical Data

|  |   |
|--|---|
| Dimensions L x W x H (inches)                  | 24,8 x 24,8 x 25,6 (static)                     |
| Dimensions L x W x H (mm)                      | 692 x 580 x 680 (static)                        |
| Space requirement/workspace L x W x H (Inches) | 43,3 x 25,6 x 26,8                              |
| Space requirement/workspace L x W x H (mm)     | Dynamic: 1030 x 580 x 680                       |
| Recommended assembly size (mm)                 | 4,5 x 4,5 - 50 x 50                             |
| Recommended component size (mm)                | 4,5 x 4,5 - 50 x 50                             |
| Compressed air connection                      | Compressed air hose outer diameter 6 mm (0,24") |
| Compressed air connection accessory            | ---   |
| Compressed air supply kPa/bar                  | 400 - 600 / 4 - 6                               |
| Air consumption l/min                          | 60 - 100  |
| Max. hot air flow rate l/min                   | 5 - 50  |
| ESD-safe                                       | on  |
| Noise level (distance 1 m) dB(A)               | < 69  |
| Weight (approx.) in kg                         | 40  |
| Power consumption                              | 1800 W  |
| Rated output of top heating (W)                | 1100  |
| Rated output of bottom heating (W)             | 1600  |
| Protection class                               | 1   |
| Voltage  | 120 V   |
| Temperature range of top heating (°C)          | ---   |
| Temperature range of bottom heating (°C)       | 50 - 400  |
| Optical positioning                            | on  |
| Positioning aid                                | yes   |
| Temperature accuracy of top heating            | ± 10°C (± 18°F)                                 |
| Temperature accuracy of bottom heating         | tbd   |
| Thermocouple connection                        | 3 x Type-K                                      |